

## SETTING THE ALTERNATE HOSTNAME


Integrations can use the alternate hostname of an Actor. Once you have installed and registered your Actor, you can configure this alternative as described in the following procedure.

### TO SET THE ALTERNATE HOSTNAME

1. Launch the Director.
2. Select **Environment > Actors**.
3. Locate the Actor you want to configure, open its Action menu, and click **Edit**.
4. Enter the alternate hostname, as shown here.



**NOTE:** This field supports several formats, such as standard FQDNs, domain\machine and domain\\machine

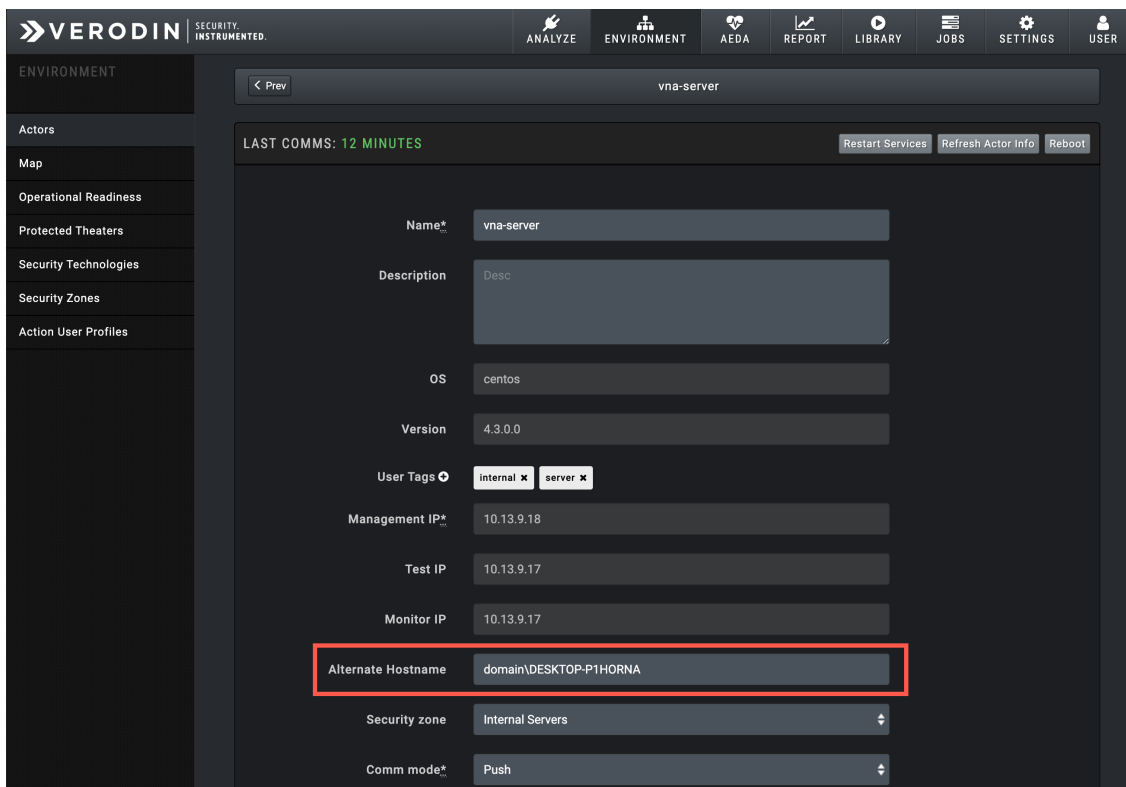

The screenshot shows the Verodin interface for configuring an actor named 'vna-server'. The interface includes a sidebar with navigation options like 'Actors', 'Map', 'Operational Readiness', 'Protected Theaters', 'Security Technologies', 'Security Zones', and 'Action User Profiles'. The main content area displays the actor's configuration details, including Name, Description, OS, Version, User Tags, Management IP, Test IP, Monitor IP, Alternate Hostname, Security zone, and Comm mode. The 'Alternate Hostname' field is highlighted with a red box and contains the value 'domain\DESKTOP-P1HORNA'.

Setting the alternate hostname

5. Click **Update Actor** to apply your changes.